



FRONT LOAD WASHER

FOR VENDED LAUNDRY APPLICATIONS

INDUSTRIAL
BY DESIGN

Dependable

- Stainless steel inner and outer drum for long-lasting worry free performance
- Three-compartment soap box for wash, bleach and softener
- Easy installation
 - » Freestanding
 - » Designed for any floor and any level
- Durable finish (white enamel or stainless steel)

Efficient

- Dynamic Balancing System
 - » Suspension & out-of-balance logic manages and redistributes unbalanced loads
 - » Quiet operation
- High-speed Extract
 - » A 1200 RPM extract speed delivers 440 G-Force
- Door opens 180° for easy loading and unloading
- Large capacity
- Low water consumption
 - » 11.7 gallons

Control

- Micro-Display
 - » Digital display shows vend price
 - » Five cycle options
 - » Cycle time countdown
 - » LED progress indicators
 - » Programmable for multiple wash/rinse cycles

Activations

- Coin Drop Installed
- Prepped for Card
- Prepped for Coin




FRONT LOAD WASHER

Specifications

| | |
|---|--|
| Available Controls | MDC |
| Control Location | Front |
| Capacity - lb (kg) | 21.5 (9.5) |
| Cylinder Volume - cu. Ft. (liters) | 3.42 (96.8) |
| Width - in (mm) | 26 7/8 (683) |
| Depth - in (mm) | 27 3/4 (704) |
| Height - in (mm) | 44 3/8 (1126) |
| Spin Speed - G-Force (RPM) | 440 (1200) |
| Motor Size - HP (kw) | Variable Speed Induction 0.9 (0.67) |
| Water Consumption per Cycle - g (l) | 11.7 (44.3) |
| WF (Water Factor) | 3.8 |
| MEF (Modified Energy Factor) | 2.98 |
| Available Water Temperatures | 3 |
| Available Cycles | Normal, Perm Press, Delicate |
| Water Pressure - PSI (Bar) | 20-120 (1.4/8.3) |
| Cycle Indicator Lights | Yes |
| Cylinder Finish | Stainless Steel |
| Available Colors | White, Stainless Steel |
| Door Type (Solid/Window) | Window |
| Available Electrical Requirements - (Voltage/Hz/Ph) | 120/60/1 - 15 Amp |
| Net Weight - lb (kg) | 270 (122) |
| Shipping Weight - lb (kg) | 290 (132) |
| Shipping Dimensions | |
| Width - in (mm) | 29 (737) |
| Depth - in (mm) | 32 3/4 (832) |
| Height - in (mm) | 45 1/2 (1156) |
| Available Agency Approvals | cUL _{US} |

ADA Compliant

Note: Not all options are available for all models. Refer to the price list for the available models and options.

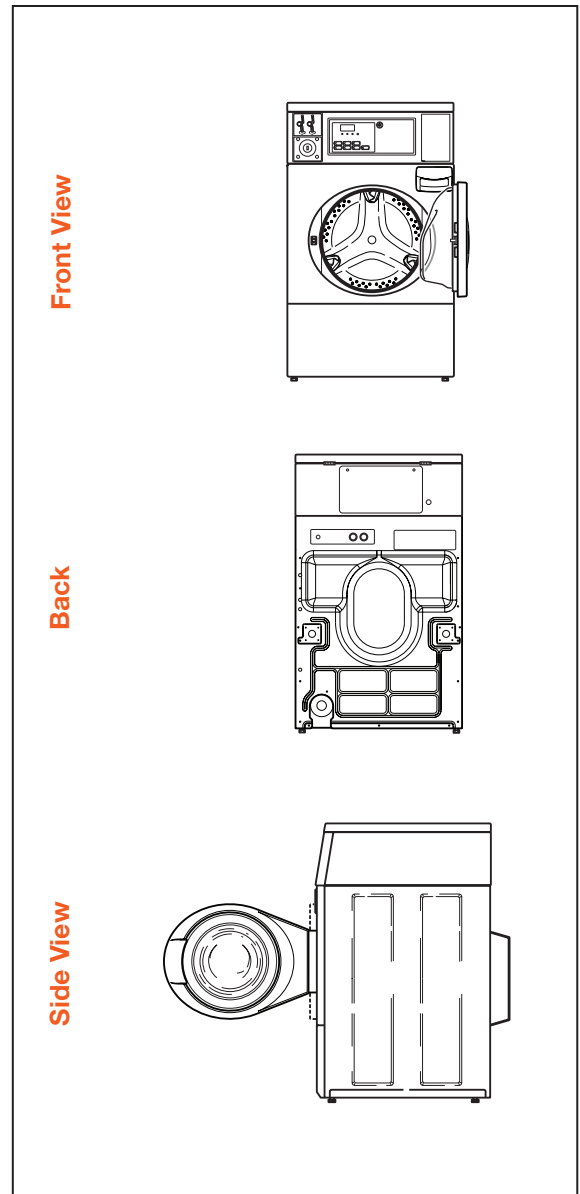

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.

©Copyright 2015 Alliance Laundry Systems LLC

Alliance Laundry Systems LLC
Shepard Street
Ripon, WI 54971